




## EMERGENCY LIGHTING

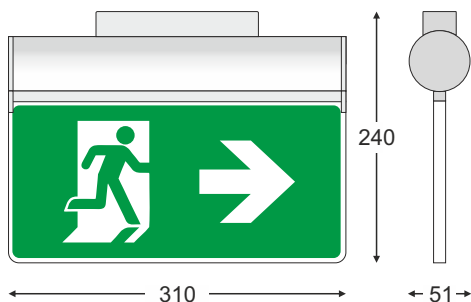

## NEW ECO LIGHT EMERGENCY LUMINAIRES

- ▼ Selftesting
- ▼ Maintained and Non-maintained operation
- ▼ Autonomy 3 hours
- ▼ Easy mounting

The company is certified by



*for a safer world!*

[www.olympia-electronics.gr](http://www.olympia-electronics.gr)

T. +30 23530 51200 | f. +30 23530 51486 | info@olympia-electronics.gr



OlympiaElectronics

Olympia Electronics

OlympiaElectronics

## TECHNICAL CHARACTERISTICS

MAINS VOLTAGE	220-240V AC/50-60Hz
MAXIMUM POWER CONSUMPTION	2.7W / 3VA
BATTERY	3.6V/1.5Ah NiMH
BATTERY PROTECTION	Overcharging and deep discharging protection
INDICATIONS	Charge LED, Lamp Fault LED, Battery Fault LED
RECHARGING TIME	24h
MINIMUM EMERGENCY DURATION	3h
LIGHT SOURCE INTENSITY (mains / emerg.)	63lm / 125lm
VIEWING DISTANCE	30m
DEGREES OF COVER PROTECTION	IP40
PRODUCED IN ACCORDANCE WITH	EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3, EN 1838
OPERATION TEMPERATURE RANGE	5 to 40 °C
RELATIVE HUMIDITY	Up to 95%
CONSTRUCTION MATERIALS	Aluminum, plexiglas
EXTERNAL DIMENSIONS (LxWxH)	310x240x51mm
TYPICAL WEIGHT	1090gr.
GUARANTEE	3 years (1 year for the battery)

### Mounting Methods

Marking direction legends



Ceiling mounted



Flag mounted on a wall



(A-1133 requirement)

Hanging installation



(A-1130 or A-1131 or A-1132 requirement)

Surface mounting on a wall



**olympia<sup>TM</sup>  
electronics**

SAFETY & SECURITY SYSTEMS

*for a safer world!*

[www.olympia-electronics.gr](http://www.olympia-electronics.gr)

T. +30 23530 51200 | F. +30 23530 51486 | [info@olympia-electronics.gr](mailto:info@olympia-electronics.gr)

Distributor



OlympiaElectronics

Olympia Electronics

OlympiaElectronics