

serie/series

lyras 160

LED

powered by
Citizen Electronics® LED
AC direct connection
220/240V
Transformer not required

simmetrico
symmetric
symétriques
simétrico
symmetrisch

example code:
art. LED 20° colour
4641 LS20 H ALL

art.
4641

design Ufficio Tecnico Landa

OHIM:
European patent No.
000346366-0003



PROJECTORS
10

corpo alluminio pressofuso
body in die casting aluminium
corps en aluminium moulé
sous pression
cuerpo aluminio inyectado
Körper aus Aluminium-
Druckguss



diffusore vetro trasparente
diffuser glass transparent
diffuseur verre transparent
difusor vidrio transparente
Diffuser Glas klar



4641 all



4641 nhg




included:
Mt.2 -H07RN-F

CL.I

FOR TECHNICAL DETAILS VISIT
www.landa.it

IP67

art.		°C	W	V	Type	Light Bulb Icon	LUX 1Mt
4641LS20N	○	20°	29	20	220-240	4000K 2385LM	6900
4641LS20H	●	20°	29	20	220-240	3000K 2280LM	6600
4641LM20N	○	40°	29	20	220-240	4000K 2385LM	2800
4641LM20H	●	40°	29	20	220-240	3000K 2280LM	2700
4641LL20N	○	60°	29	20	220-240	4000K 2385LM	1450
4641LL20H	●	60°	29	20	220-240	3000K 2280LM	1400
4641LS30N	○	20°	35	33	220-240	4000K 3515LM	9500
4641LS30H	●	20°	35	33	220-240	3000K 3300LM	8900
4641LM30N	○	40°	35	33	220-240	4000K 3515LM	4100
4641LM30H	●	40°	35	33	220-240	3000K 3300LM	3800
4641LL30N	○	60°	35	33	220-240	4000K 3515LM	2100
4641LL30H	●	60°	35	33	220-240	3000K 3300LM	2000




ELECTRIFICATION

LED & INSTALLATION

dettagli / details / details
détalles / details:
p.A52 - A53

Energy efficiency classes

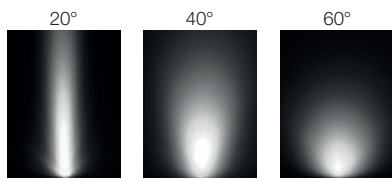


codeLS20 codeLM20 codeLL20

A++ ÷ A

lyras 160

Projectors



Recessed



Contemporary



Traditional



PROJECTORS



Accessories on request:



code 00A4641.01
Joint for pole ø 60mm



code 00A4641.02
Tree rope



code 00A4641.03
Mounting spike



code 0404M004
Single connection IP68



code 0404M003
Loop in loop out IP68

