

New Weather Light


Waterproof
emergency luminaire



The packaging contains: 12 pcs.
Packaging dimensions (LxWxH): 500x375x315mm
Three adhesive legends included in the package (right, left, down)



■ Mounting methods



■ Legends

Additional stickers after order



705693006
S-1938/S65L



705693008
S-1938/S65R



705693007
S-1938/S65D

Pic. 1



A-9100 Double sided diffuser (Pic. B)

A-9100/ST Double sided diffuser for self-testing luminaires (Pic. B)

All GR-19xx series codes can also be provided with plastic double sided diffuser with order code: GR-19xx/A-9100 (pic. B)

■ Legends for A-9100 and A-9100/ST double sided diffusers

Additional stickers after order



705693020
/S65L



705693021
/S65R



705693022
/S65D

Pic. 2



A-1900 Test card
(after order)

Magnetic test card for resetting errors
& manual test for all functions of the luminaire



LED WATERPROOF IP65, SELF-TESTING MAINTAINED/NON MAINTAINED EMERGENCY LUMINAIRES 220-240V AC

TYPE	PICTURE	CODE	BATTERY	DURATION	CONSUMPTION	LIGHT OUTPUT (230V/EMERGENCY)	WEIGHT
GR-1938/15L*	A	923193800	3,6V/600mAh Ni-Cd	1,5 h	3,8VA	105/105 lm	730 gr
GR-1938/30L*	A	923193801	3,6V/1,5Ah Ni-Cd	1,5 h	4,9VA	210/210 lm	810 gr
GR-1939/15L*	A	923193900	3,6V/1,5Ah Ni-Cd	3 h	3,7VA	105/105 lm	810 gr
GR-1939/30L*	A	923193901	3,6V/3Ah Ni-Cd	3 h	5,6VA	210/210 lm	880 gr
GR-1938/4P	A	923193802	4,8V/1,5Ah Ni-Cd	1,5 h	5,1VA	175/350 lm	860 gr
GR-1938/6P	A	923193803	4,8V/3Ah Ni-Cd	1,5 h	6,5VA	245/480 lm	945 gr
GR-1939/4P	A	923193902	4,8V/3Ah Ni-Cd	3 h	5,7VA	175/350 lm	945 gr
GR-1939/6P	A	923193903	4,8V/4Ah Ni-Mh	3 h	6,5VA	245/480 lm	1000 gr

**LED WATERPROOF IP65 MAINTAINED/NON-MAINTAINED EMERGENCY LUMINAIRES 220-240V AC
(internal selection with jumper)**

TYPE	PICTURE	CODE	BATTERY	DURATION	CONSUMPTION	LIGHT OUTPUT (230V/EMERGENCY)	WEIGHT
GR-1935/15L*	A	923193500	3,6V/600mAh Ni-Cd	1,5 h	3VA	40/105 lm	765 gr
GR-1935/30L*	A	923193501	3,6V/1,5Ah Ni-Cd	1,5 h	3VA	40/210 lm	845 gr
GR-1936/15L*	A	923193600	3,6V/1,5Ah Ni-Cd	3 h	3VA	40/105 lm	845 gr
GR-1936/30L*	A	923193601	3,6V/3Ah Ni-Cd	3 h	4VA	40/210 lm	945 gr

LED WATERPROOF IP65 ADDRESSABLE MAINTAINED/NON MAINTAINED EMERGENCY LUMINAIRE 24V ACDC (for CBS)

TYPE	PICTURE	CODE	BATTERY	DURATION	CONSUMPTION	LIGHT OUTPUT (230V/EMERGENCY)	WEIGHT
GR-1926/15L/24V/ADR	A	923192608	-	-	1,5W	125lm	510 gr
GR-1926/30L/24V/ADR	A	923192609	-	-	2,3W	255lm	510 gr


**LED WATERPROOF IP65, ADDRESSABLE, SELF-TESTING MAINTAINED/NON MAINTAINED EMERGENCY LUMINAIRES
(for GR-6500 panel)**

TYPE	PICTURE	CODE	BATTERY	DURATION	CONSUMPTION	LIGHT OUTPUT (230V/EMERGENCY)	WEIGHT
GR-1938/15L/ADR*	A	923193804	3,6V-600mAh	1,5h	3,8VA	105/105lm	595 gr
GR-1938/30L/ADR*	A	923193805	3,6V-1,5Ah	1,5h	4,9VA	210/210lm	675 gr
GR-1939/15L/ADR*	A	923193904	3,6V-1,5Ah	3h	3,7VA	105/105lm	675 gr
GR-1939/30L/ADR*	A	923193905	3,6V-3Ah	3h	5,6VA	210/210lm	745 gr

ACCESSORIES

TYPE	PICTURE	CODE	DESCRIPTION
A-9100	1	927910001	Double sided diffuser
A-9100/ST	1	927910000	Double sided diffuser for self-testing luminaires
A-1900	2	927190000	Test card

Dimensions in mm

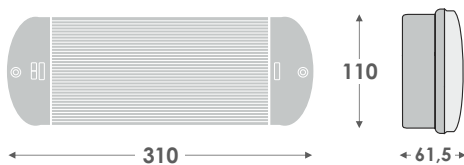

Photometric data

GR-1935/15L

