



# EMERGENCY LIGHTING



**NEW**

**KLD**

**EMERGENCY LUMINAIRES**

- ▼ Maintained operation
- ▼ Autonomous duration 3 hours
- ▼ Multiple mounting methods

Produced in accordance with the  
 EN 60598-1, EN 60598-2-22,  
 EN 55015, EN 61547, EN 61000-3-2,  
 EN 61000-3-3, EN 1838



Ceiling mounting with extension rod



Hanging installation



Wall mounting



Vertical wall mounting



KLR-20



KLD-22



KLD-30



IP54



CE

[www.olympia-electronics.gr](http://www.olympia-electronics.gr)

The company is certified by:



*for a safer world!*

European manufacturer





Accessory for wall mounting (included in packaging)

**LED MAINTAINED EMERGENCY INDICATION LUMINARIES**


	KLR-20	KLD-22	KLD-30
MAINS VOLTAGE		220-240V AC	
CONSUMPTION		3.2W / 3.4VA	
BATTERY		3.6V/1Ah Nicd	
MINIMUM EMERGENCY DURATION		3h	
LIGHT SOURCE INTENSITY (mains / emerg.)		75lm / 75lm	
VIEWING DISTANCE	20m	22m	30m
DEGREES OF COVER PROTECTION		IP54	

**LED SELF TESTING MAINTAINED EMERGENCY INDICATION LUMINARIES**

	KLR-20/ST	KLD-22/ST	KLD-30/ST
MAINS VOLTAGE		220-240V AC	
CONSUMPTION		3.5W / 4VA	
BATTERY		3.6V/1Ah Nicd	
MINIMUM EMERGENCY DURATION		3h	
LIGHT SOURCE INTENSITY (mains / emerg.)		75lm / 75lm	
VIEWING DISTANCE	20m	22m	30m
DEGREES OF COVER PROTECTION		IP54	

Marking direction legends

Dimensions in mm

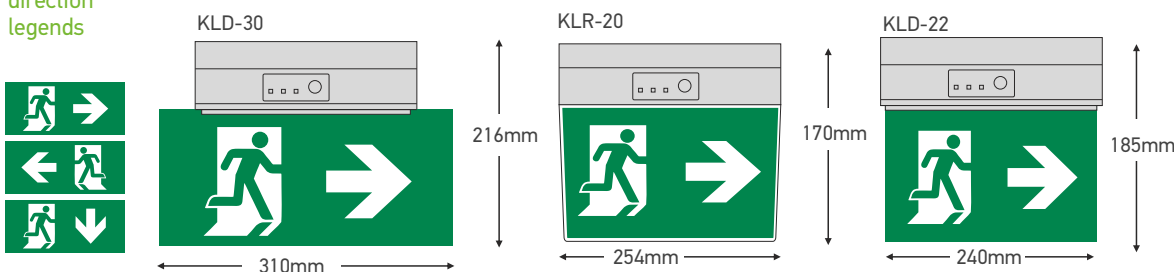

*for a safer world!*

Distributor



[www.olympia-electronics.gr](http://www.olympia-electronics.gr)

T. +30 23530 51200 | F. +30 23530 51486 | info@olympia-electronics.gr

F-001-036