

24V DC ADDRESSABLE CENTRAL BATTERY SYSTEM (CBS)





1

- Output: 24V DC in main & battery
- 300 - 600W panels
- 4 - 8 zones
- Capability for connecting several panels on an ethernet network
- The programming, control and testing of the system can be done using a web browser (Internet Explorer, Mozilla Firefox, Chrome)
- Independent program for each zone for maintained or non-maintained operation.



*They have BSI certification

Dimensions

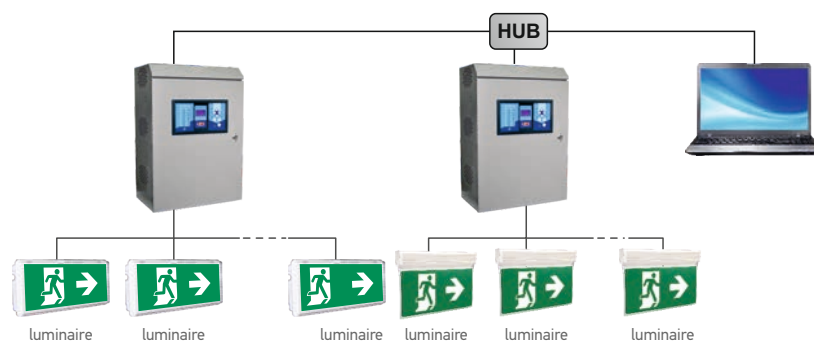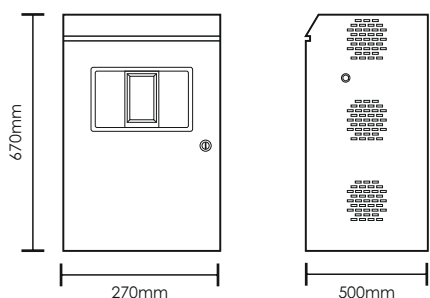

CENTRAL ADDRESSABLE PANEL 300W / 24V DC PANELS

CODE	TYPE	IMAGE	DESCRIPTION	kg
923860004	GR-8600/300/4*	1	300 Watt panel with 4 lighting circuits. Requires 2 batteries 12V/33Ah (A-1200)	19300 gr.
923860005	GR-8600/300/8*	1	300 Watt panel with 8 lighting circuits. Requires 2 batteries 12V/33Ah (A-1200)	19600 gr.

600W / 24V DC PANELS

CODE	TYPE	IMAGE	DESCRIPTION	kg
923860006	GR-8600/600/8*	1	600 Watt panel with 8 lighting circuits. Requires 2 batteries 12V/55Ah (A-1202)	20900 gr.

ACCESSORIES ON DEMAND

CODE	TYPE	IMAGE	DESCRIPTION	kg
923861000	GR-8610	3	4 zone lighting circuit extension card for addressable luminaires CBS 24V / 300 Watt	347 gr.
923853000	GR-8530	4	Network card through ETHERNET	32 gr.
923821000	GR-8210/MONIT	5	Monitoring device for CBS systems	300 gr.
603101233	A-1200	-	Lead battery 12V/33Ah for 300W Panel	9200 gr.
603101255	A-1202	-	Lead battery 12V/55Ah for 600W Panel	15300 gr.

PERIPHERALS UPON DEMAND

CODE	TYPE	IMAGE	DESCRIPTION	kg
808385002	GR-8500/PS	6	Spare power supply for maintained operation (GR-8500, GR-8600)	
808385003	GR-8500/PSC	7	Spare power supply for charging (GR-8500, GR-8600, GR-9500)	



3
GR-8610



4
GR-8530



5
GR-8210/MONIT



6
GR-8500/PS




7
GR-8500/PSC

ADDRESSABLE 24V DC WEATHER LIGHT




CODE	TYPE	IP65	1,5W	Mains/ Emergency	kg
923192608	GR-1926/15L/24V/ADR*	IP65	1,5W	125 lm	642 gr.
923192609	GR-1926/30L/24V/ADR*	IP65	2,3W	255 lm	642 gr.

Dimensions

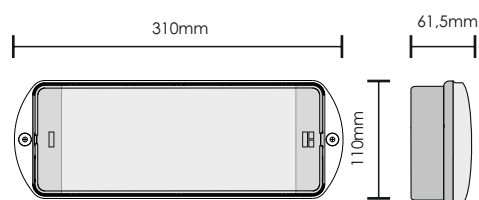

Photometric

GR-1926/15L/24V/ADR, GR-1926/30L/24V/ADR



ADDRESSABLE 24V DC EASY LIGHT




*They have BSI certification




CODE	TYPE			 Mains/ Emergency	
923324021	GR-324/15L/24V/ADR/A*	IP40	1,5W	125lm	710 gr.
923324022	GR-324/30L/24V/ADR/A*	IP40	2,3W	255lm	710 gr.

Dimensions

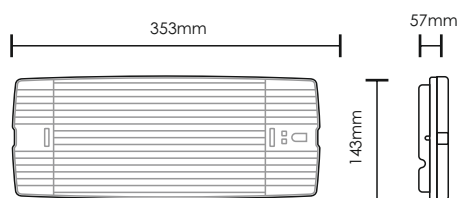

Photometric

GR-324/15L/24V/ADR/A, GR-324/30L/24V/ADR/A



ADDRESSABLE 24V DC EASY LIGHT




*They have BSI certification




CODE	TYPE				
923132501	GR-1325/15L/24V/ADR*	IP40	1,5W	125 lm	710 gr.
923132500	GR-1325/30L/24V/ADR*	IP40	2,3W	255 lm	710 gr.

Dimensions

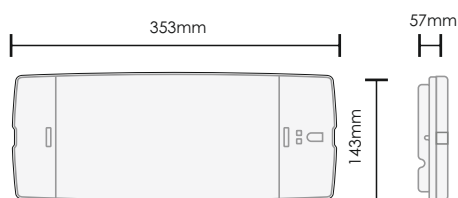

Photometric

GR-1325/15L/24V/ADR, GR-1325/30L/24V/ADR




ADDRESSABLE 24V DC LINEAR LIGHT

ADDRESSABLE 24V DC ECO LIGHT



KLIN-20




KLD




CODE	TYPE	IP54	1,2W	112 lm	kg
922502062	KLIN-20/CBS/24V/ADR	IP54	1,2W	112 lm	914 gr.
922502202	KLD-22/CBS/24V/ADR	IP54	1,2W	112 lm	1105 gr.
922503052	KLD-30/CBS/24V/ADR	IP54	1,2W	112 lm	-

Dimensions


KLIN-20



KLD-30



KLD-22

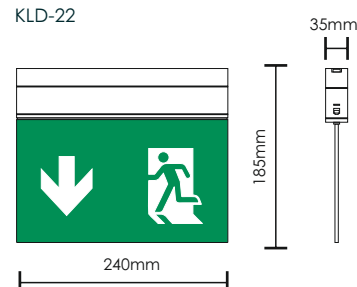

ADDRESSABLE 24V DC ECO LIGHT




ZLD	ZLD-28	ZLD-34	ZLD-44								
CE	16m	30m	38m	→	IP40	Ik07				ADR ADDRESSABLE	CBS
KLR											
CE	20m	→	IP54							ADR ADDRESSABLE	CBS


CODE	TYPE				
922502869	ZLD-28/24V/ADR/EM*	IP40	1,6W	150 lm	887 gr.
922503473	ZLD-34/24V/ADR/EM*	IP40	1,8W	175 lm	1266 gr.
922502052	KLR-20/CBS/24V/ADR	IP54	1,2W	112 lm	680 gr.

Dimensions


ZLD-xx

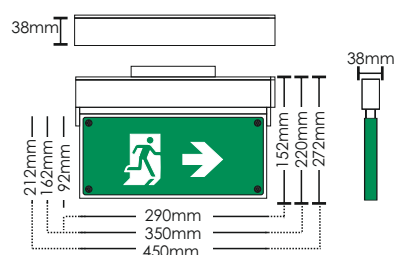

KLR-20




ADDRESSABLE 24V DC BAU LIGHT

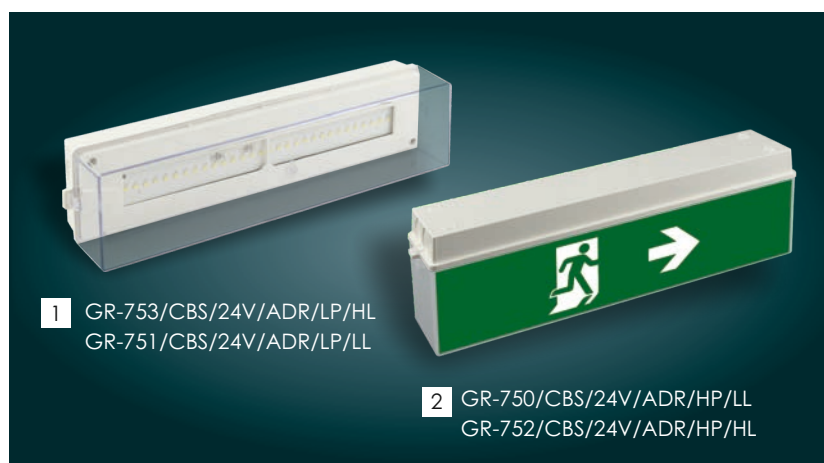


CODE	TYPE	IP54	1,5W	Mains/ Emergency	kg
923750003	GR-750/CBS/24V/ADR/HP/LL	IP54	1,5W	200 lm	753 gr.
923751002	GR-751/CBS/24V/ADR/LP/LL	IP54	1,5W	200 lm	705 gr.
923752002	GR-752/CBS/24V/ADR/HP/HL	IP54	2,5W	350 lm	753 gr.
923753002	GR-753/CBS/24V/ADR/LP/HL	IP54	2,5W	350 lm	705 gr.

Dimensions

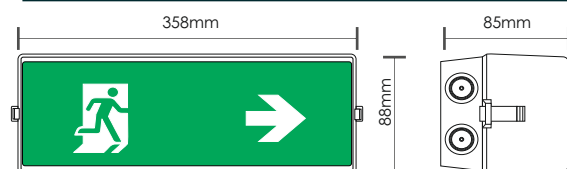

LP: Low Profile /deep transparent hood

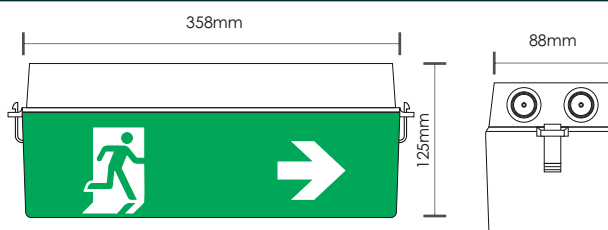


HP: High Profile/ High opal hood

ADDRESSABLE 24V DC LED LIGHT BOX





CODE	TYPE	IP44	2,5W	Mains/ Emergency	kg
923026005	LLB-26/CBS/24V/ADR	IP44	2,5W	300 lm	843 gr.

Dimensions

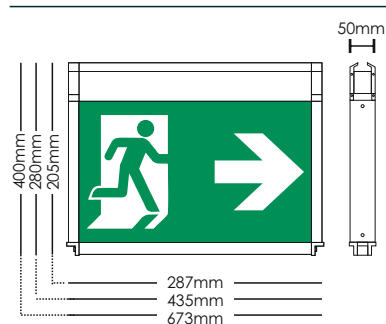


ADDRESSABLE 24V DC SPOT LIGHT

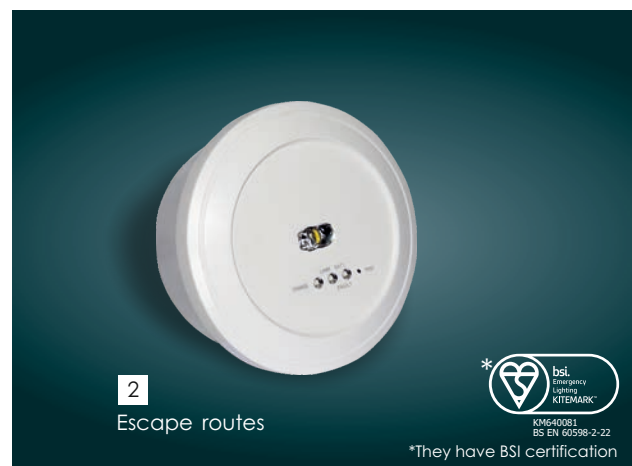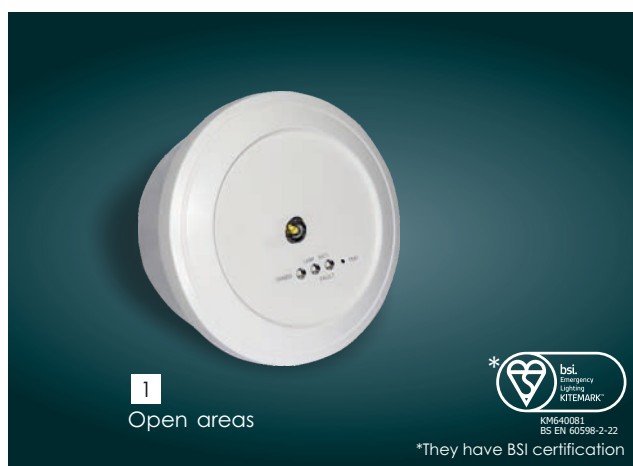


CODE	TYPE	IMAGE	IP40	3,2W	Mains/ Emergency	kg
923281004	GR-281/24V/ADR*	1	IP40	3,2W	270 lm	324 gr.
923280004	GR-280/24V/ADR*	2	IP40	3,2W	270 lm	324gr.

Dimensions

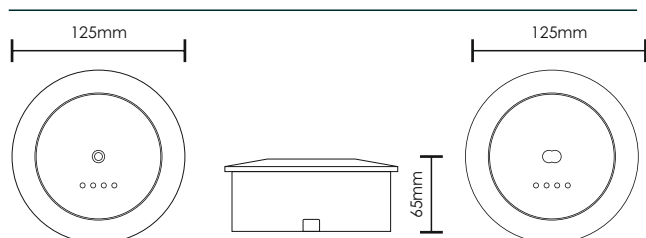

Photometric

GR-281/24V/ADR



Photometric

GR-280/24V/ADR

